




SYNERGY5 PROFILE

Official Photometric Chart rev.0 (01/03/2018)

NARROW ZOOM

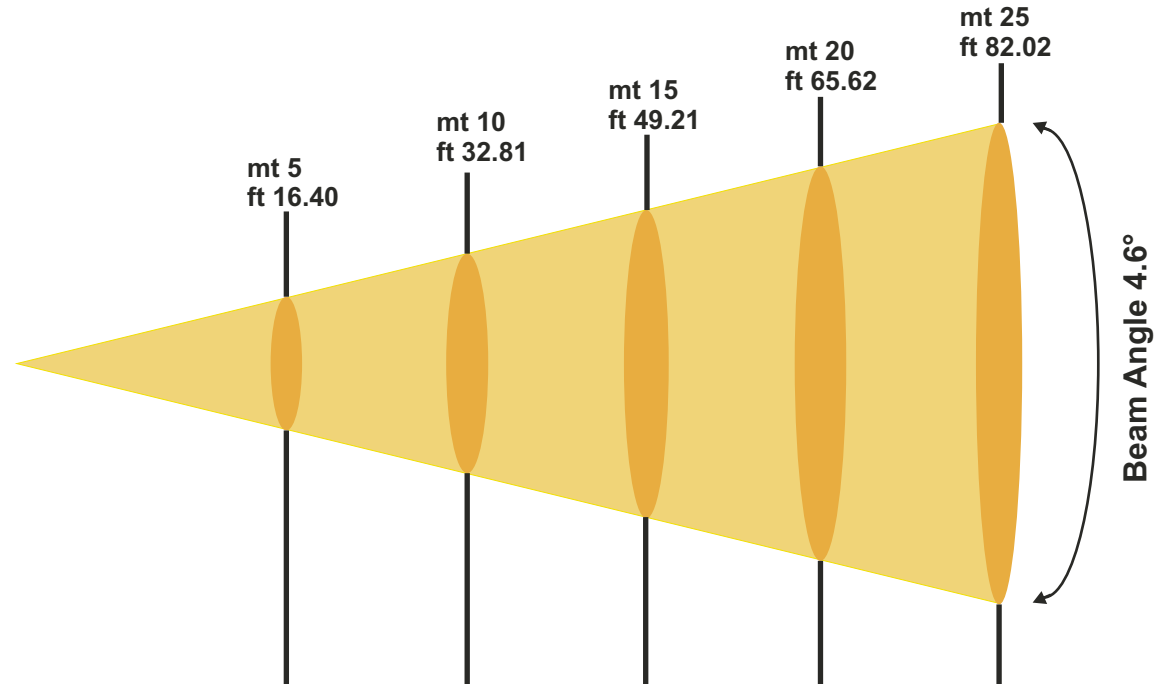


Lux center [lx]	49940	12485	5549	3121	1998
Foot candles [fc]	4641	1160	516	290	186
Diameter [cm]	40	80	120	161	201
Diameter [ft]	1.32	2.64	3.95	5.27	6.59

Beam Angle 4.6°



SYNERGY5 PROFILE

Official Photometric Chart rev.0 (01/03/2018)

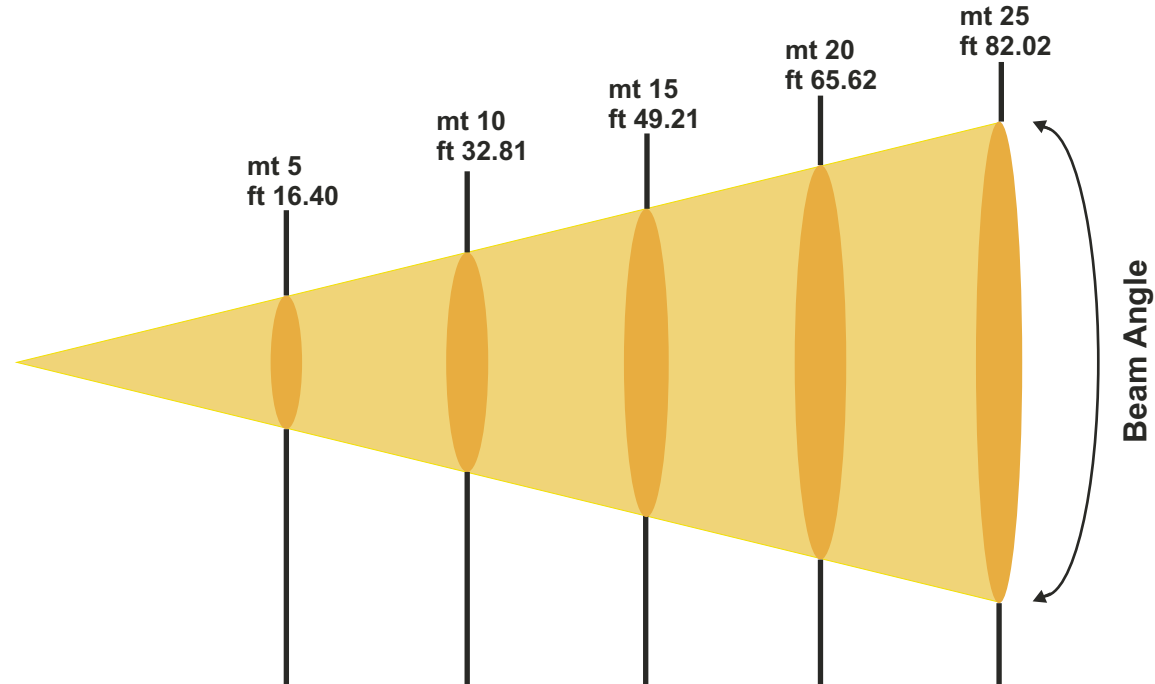

Lux center [lx]	49269	12317	5474	3079	1971
Foot candles [fc]	4579	1145	509	286	183
Diameter [cm]	52	105	157	210	262
Diameter [ft]	1.72	3.44	5.16	6.88	8.60

Beam Angle 6°

Lux center [lx]	29060	7265	3229	1816	1162
Foot candles [fc]	2701	675	300	169	108
Diameter [cm]	79	157	236	315	394
Diameter [ft]	2.58	5.16	7.75	10.33	12.91

Beam Angle 9°

Lux center [lx]	24830	6208	2759	1552	993
Foot candles [fc]	2308	577	256	144	92
Diameter [cm]	96	193	289	385	481
Diameter [ft]	3.16	6.32	9.48	12.64	15.80


Beam Angle 11°



SYNERGY5 PROFILE

Official Photometric Chart rev.0 (01/03/2018)

WIDE ZOOM

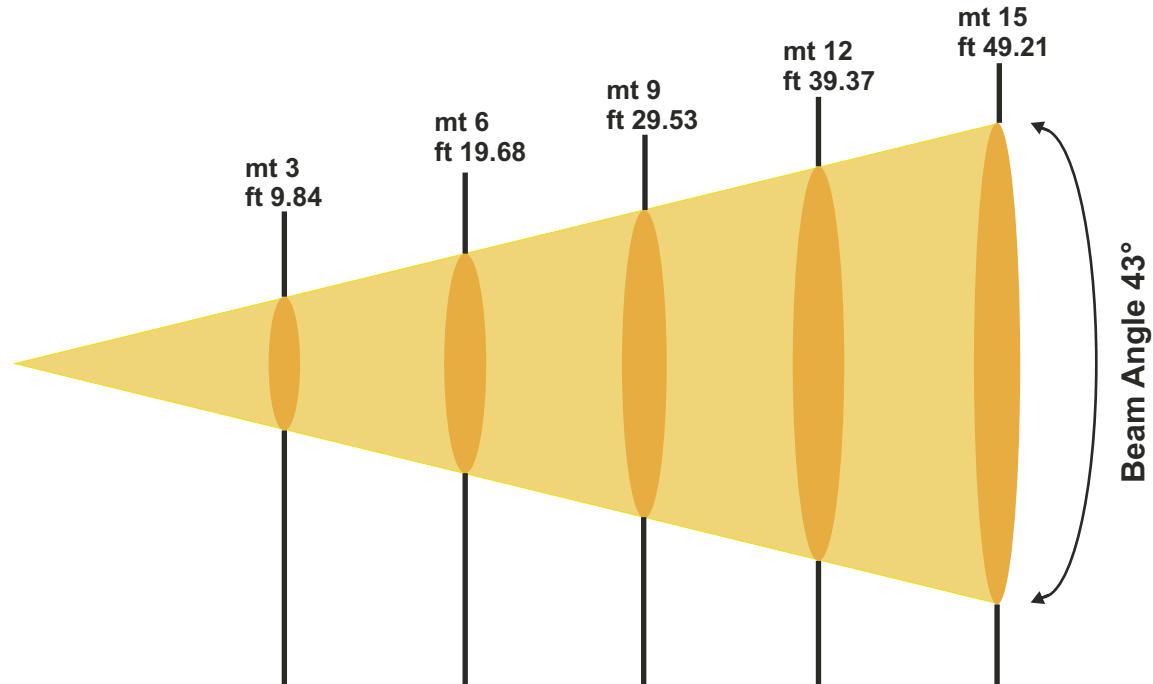

Lux center [lx]	4119	1030	458	257	165
Foot candles [fc]	383	96	43	24	15
Diameter [cm]	236	473	709	945	1182
Diameter [ft]	7.75	15.51	23.26	31.02	38.77

Beam Angle 43°

Beam Angle 43°